


DUO AC-LED COLOR OPTION LIGHT BARS

Brushed Aluminum Finish

Minimal space between luminaires

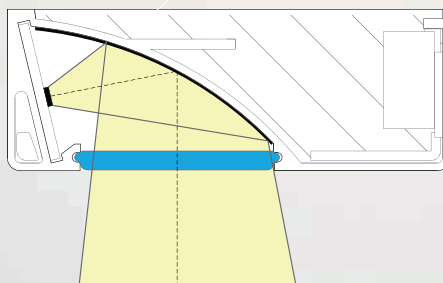

Using a 98% efficient reflector, light from the LED sources inside the housing diffuse inside the mixing chamber in order to create evenly distributed illumination. Patent Pending

DUO AC-LED COLOR OPTION LIGHT BARS



TITLE 24
CALIFORNIA



- Color Temp:** 2700K and 3000K

CRI: 90+


Dimming: 100% – 10% smooth and continuous ELV and TRIAC dimming

Rated Life: 54,000 hours
- Uniform Light
 - 120VAC - no driver needed
 - Diffused light source reduces glare
 - 1 inch Profile
- Multiple knock outs for ease of wiring
 - Extruded aluminum construction for optimal thermal management
 - Romex® connectors included
 - One "I" connector included with each luminaire

	Model	Length	Watt	Lumens	Color Temp	Finish
	BA-ACLED8-27/30	8"	6.0W	330	2700K and 3000K	BZ Bronze AL Brushed Aluminum WT White
	BA-ACLED12-27/30	12"	8.0W	475		
	BA-ACLED18-27/30	18"	10.0W	545		
	BA-ACLED24-27/30	24"	15.0W	930		
	BA-ACLED30-27/30	30"	17.5W	1095		

Example: **BA-ACLED12-27/30AL**


- May be hard-wired with 120V power or used with a plug-in power cord
- Subsequent fixtures may be powered with an "I" Connector or Interconnect Cable carrying 120V
- May be individually switched and/or wired to a wall box switch/dimmer



Power Cord

Model	Length
BA-PC6 WT White BK Black	6'


Supplies power in any application.



"I" Connector

Model	Max Fixture Run
BA-I-WT	6

Interconnection for seamless end to end transitions. **Each light bar includes one.**



Interconnect Cable

Model	Length	Max Fixture Run
BA-IC12	12"	4
BA-IC24	24"	4
BA-IC36	36"	3

WT White
BK Black

Example: **BA-IC12-WT**

Links two light bars using a single power connection.